
Specification **G970**II Pro

P	roduct model	G970II Pro
	Channels	800 channels
GNSS	Satellite Signals	GPS: L1C/A,L1C,L1P,L2C,L2P,L5;
		GLONASS: G1P1, G10C, G20C, G2P2, G30C
		BDS: B1I, B2I, B3I, B1C, B2a, B2b, ACEBOC;
		Galileo: E1BC, E5a, E5b, ALTBOC, E6
		QZSS: L1C/A, L1C, L2C, L5, LEX ;
		SBAS: L1, L5;
		IRNSS: L5; L-Band
Accuracy	Static	H: 2.5mm±1ppm, V: 5mm±1ppm
	RTK	H: 8mm±1ppm, V: 15mm±1ppm
	DGNSS	<0.5m
	ATLAS H10	8cm
	Initialization Time	8s
	Initialization	99.9%
	Reliable	33.370
	OS	Linux
System	Memory	8GB, support expandable MicroSD 32G
	Wi-Fi	802.11 b/g/n
	Bluetooth	V5.0+EDR/V4.1Dual, Class2
	E-Bubble	Support
	IMU Tilt Survey	Fusion positioning, 400Hz refresh rate, 2cm (@60°Tilt degree)
	Audio	support TTS audio broadcast
Datalink	UHF radio	Tx/Rx Internal Radio, 1W, 410-470MHz
	Radio protocol	TrimTalk 450S, PCC GMSK, SATEL,
		HITARGET(9600), HITARGET(19200), TrimTalk(4800),
	40 Nationals	HZSZ, South 9600, TrimMark III, South 19200, GEOTALK, GEOMARK
	4G Network	GSM: 900/1800MHz CDMA 1x/EVDO: BC0
		WCDMA: B1
		TD-SCDMA: B34/B39
		FDD LTE: B1/B3/B8
	Defenses	TDD LTE: B38/B39/B40/B41 RTCM2.3, RTCM3.2, CMR,CMR+,ROX
	Reference outputs	KTOWIZ.3, KTOWI3.2, GWIK,GWIKT,KOX
	Interface	1*TNC Radio Antenna, 1*5Pin(Power & RS232),1*7Pin (USB 81 RS232)
Physical	Button	1 Power Button
	Indication Light	4 Indication Lights
	Size	Ф156mm×H76mm
	Weight	1.2kg
Power supply	Battery capacity	7.2V, 24.5Wh(standard two batteries)
	Life Timer	
		Static Survey: 15 hours, Rover RTK survey: 12h
	External power source	DC 9-18V, with overvoltage protection
Environment	Work Temperature	-45°C~+75°C
	Storage	-55℃~+85℃
	Temperature	
	Waterproof	IP68
	& dustproof	100% anti-condensation
	Humidity	100% anti-condensation

- (1) Accuracy and reliability specifications may be affected by multipath, satellite geometry and atmospheric Conditions. Performances assume minimum of 5 satellites, follow up of recommended general GPS practices.
 (2) Operating time varies based on temperature. Specifications are subject to change without notice.

G970 Pro GNSS RTK



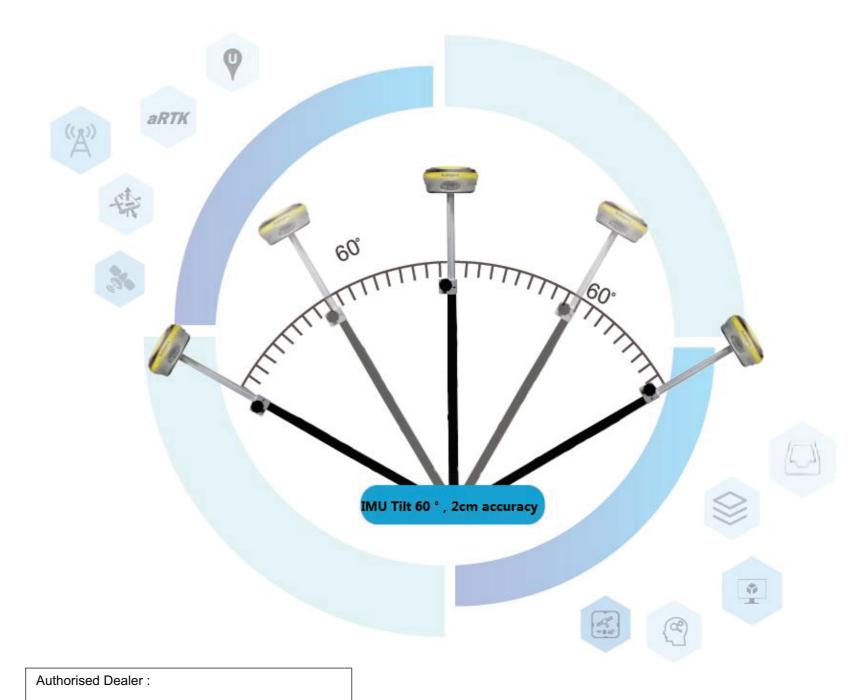

G970 □ PRO Features

Since G970II Pro launch, G970II Pro has been recognized by the majority of users for its excellent quality and excellent performance, and has become a star product in the RTK market. Now, the G970II is newly upgraded, the G970II Pro is launched, and a new inertial navigation technology is added to support the fusion positioning.







"Athena" RTK engine,

ATLAS

aRTK

Core Technology

The G970II PRO Extreme Edition is equipped with a new generation of highprecision positioning boards, 800 super channels, supporting 4-satellites full-band satellite signal reception, and fully supports the fourth-generation GNSS positioning technology.

- ♦ A new generation of Athena RTK engine to effectively improve the initialization speed and accuracy in harsh environments.
- ♦ Support "ATLAS" L-Band signal receiving, single-machine centimeter-level positioning accuracy anywhere in the world.
- ♦ Support "aRTK" technology, maintain a fixed resolution for a period of time in the case of a differential data link interruption.









Fusion Positioning

60 ° Tilt Survey

High dynamic output

• • • • • • •

Fusion positioning

Using fusion positioning technology, built-in high-precision IMU inertial navigation module, patented IMU inertial navigation and GNSS fusion positioning algorithm, Support 400Hz positioning data output, tilt 60 degrees positioning accuracy 2cm, can do tilt measurement, Surveying at any time.



Easy Surveying

Combined Antenna



A new generation of combined antennas, GNSS, WiFi, Bluetooth, 4G. The antenna is integrated, the system level is optimized, and the signal strength is improved Up 30%!

Dual Batteries Dual insurance



Dual battery + dual battery compartment double insurance design, unique ingenuity, battery self-contained power intelligent detection chip, remaining power, one click know!







Intelligent System



Based on intelligent operating system, the newly designed new generation WebUI makes RTK operation as simple as the Internet; intelligent TTS voice prompts support user DIY settings; UniCloud private cloud service, remotely control the working status, make your instrument smarter!

Beyond, because I don't believe in perfection

