

# 3D Choke Ring Antenna HX-CGX601A

**Harxon**  
a *BDStar* company

REVOLUTIONARY DESIGN,  
HIGH PERFORMANCE  
MULTI-CONSTELLATION ANTENNA



## HIGH PHASE CENTER STABILITY

The unique 3D choke ring design of HX-CGX601A ensures an excellent multipath reduction performance across all GNSS frequency bands including L-Band. And the antenna features the Harxon patented multi-point feeding technology to achieve greater phase center stability and hence effectively improve measurement accuracy. It is ideal for applications of CORS stations, bridge and building deformation monitoring or geological monitoring due to its sub-millimeter phase center stability.

## TRACKING IN CHALLENGING ENVIRONMENTS

The strong ability to receive low elevation signals with high gain and wide beam width makes HX-CGX601A an excellent choice for tracking visible satellites and provide stable and precision GNSS data under complex environments, such as obstructed environment of tree lines or construction.

## STRONG ANTI-INTERFERENCE PERFORMANCE

The antenna LNA features an excellent out-of-band rejection performance, which can suppress the EMI, providing the stability and reliability of GNSS signals. Also it effectively avoids disconnection dangerous when receivers are being interfered by wireless communication systems, for example power grid, communication base station or radio modem applications.

## MORE RUGGEDIZED FOR LONG LASTING DURABILITY

The HX-CGX601A cover is made of Glass Fiber Reinforced Polymer(GFRP) material and is structurally strong and reliable. The newly designed choke rings are treated with a more robust double treatment for longer lasting durability in harsh environments. The IP67 ruggedized cover is also designed for added protection for inside antenna avoid from dust and water. The antenna MTBF is over 30000 hours, which ensures long-time outdoor operation in challenging environments of high low temperature, high humidity and high salt fog.

## KEY FEATURES

- Support GPS, Glonass, Galileo, Beidou, QZSS, IRNSS and SBAS signal reception
- Stable phase center guarantees the accuracy of positioning within sub-millimeter level
- Strong anti-interference ability to endure the challenging operating environments
- IP67 reliable and ruggedized cover protection

# 3D Choke Ring Antenna HX-CGX601A

**Harxon**  
a *BDStar* company

## PERFORMANCE

### Signal Received

GPS	L1/L2/L5/L-Band
GLONASS	L1/L2/L3
GALILEO	E1/E5a/E5b/E6
BDS	B1/B2/B3
QZSS	L1/L2/L5/L6
IRNSS	L5
SBAS	L1/L5

**Nominal Impedance** 50Ω

**Polarization** RHCP

**Axial Ratio** ≤2dB

### Gain at Zenith (90°)

1164-1300MHz	7.0dBi(maximum)
1525-1615MHz	6.5dBi(maximum)

**LNA Gain** 50dB(typical)

**Noise Figure** ≤2dB

**Output/Input VSWR** ≤2.0

**Operation Voltage** +3.3VDC to +12VDC

**Operation Current** 60mA(maximum)

**Group Delay Ripple** <5ns

## MECHANICAL

**Dimensions** φ379\*312mm

**Connector** TNC female

**Weight** ≤10.5kg

**Mounting** BSW5/8"-11 screw, depth≥22mm

## ENVIRONMENTAL

### Temperature

Operating -40°C to +85°C

Storage -55°C to +85°C

**Humidity** 95% non-condensing

**Water/Dust Resistance** IP67

**Regulatory Compliance** IGS, NGS, CE, FCC, RoHS

For the most recent details of this product:

<http://en.harxon.com/products-detail.php?Prolid=34>

[en.harxon.com](http://en.harxon.com)

sales@harxon.com


9/F, Block B, Building D3, TCL International  
E City, NO.1001 Zhongshanyuan Road,  
Nanshan District, Shenzhen, China

Tel: +86-755-26989948

Fax: +86-755-26989994

**Version 5** Specifications subject to change without notice.  
©2021 Harxon Corporation. All rights reserved.  
Printed in China  
July 2021

## Structure& Phase Center Drawing (mm)

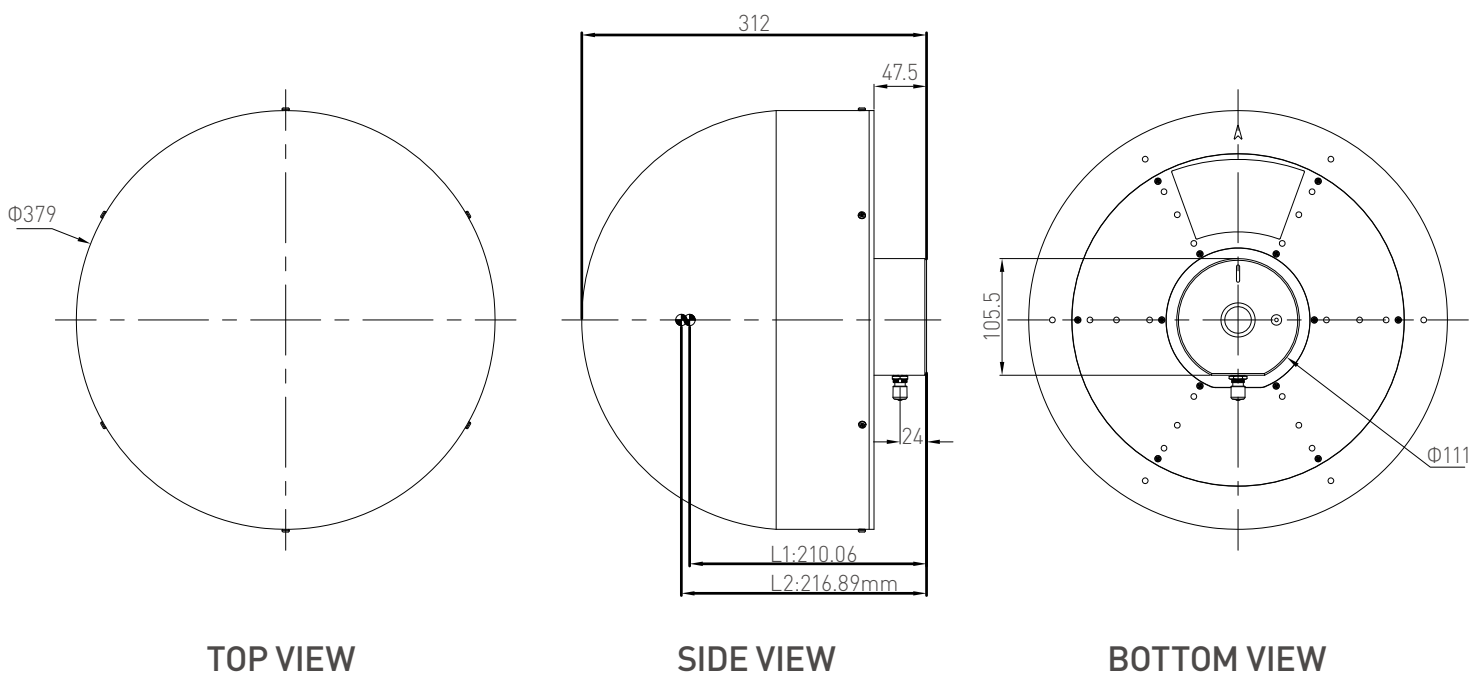

Undeclared tolerance:±0.3mm